


Calibration Bar Leveling Distance

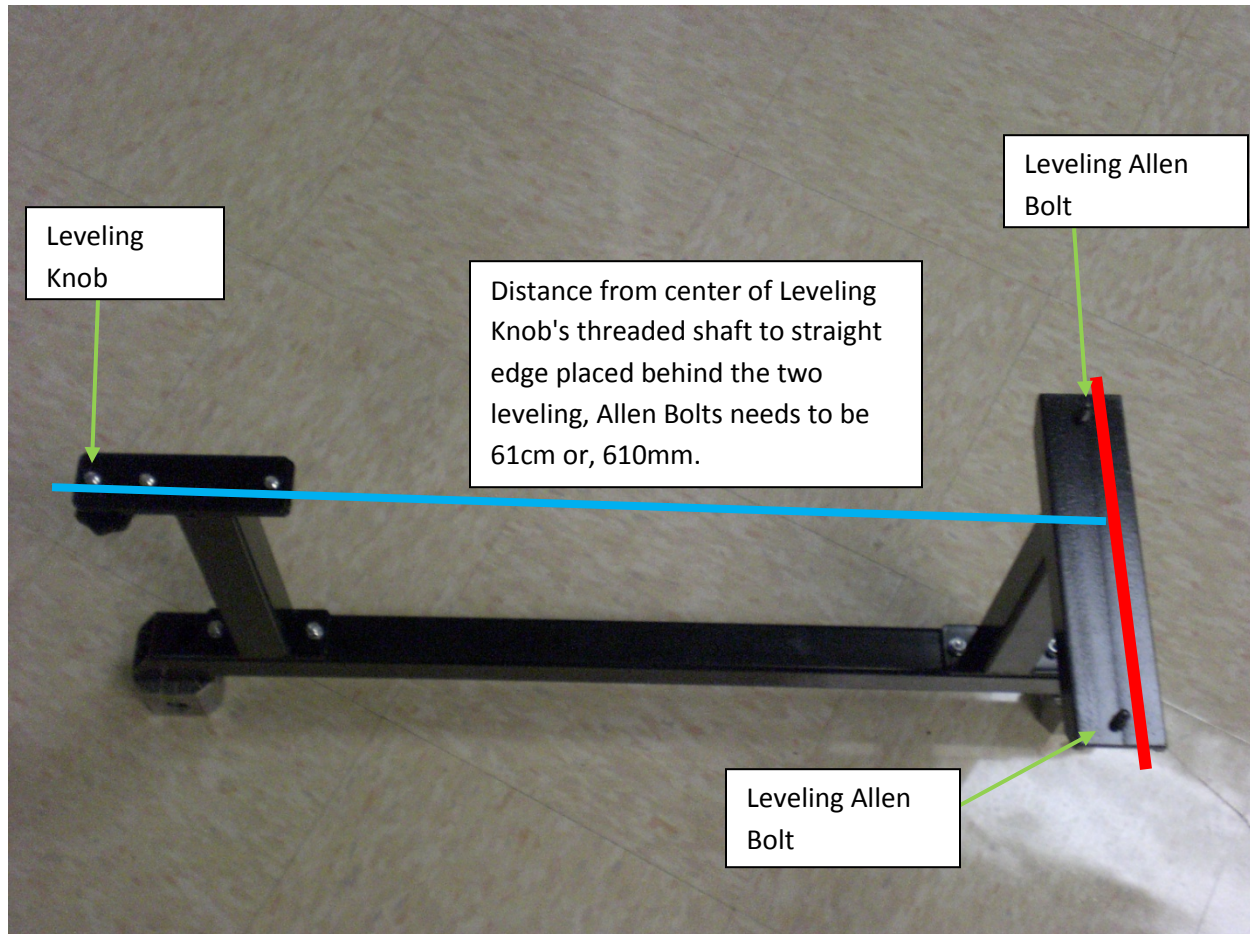

The Calibration Bar for the 301, 401 and 601 Wheel Aligners is pre-calibrated for accuracy. The sliver, steel cubes are set with a jig and care should be taken not to displace these. The Leveling Knob is threaded into a sliding plate which is also pre-set. The sliding plate can be reset to its proper position in the event that it gets moved forward or, back. Place a straight edge to the outside of the Leveling Allen Bolts (Make certain that the straight edge touches both bolts). Then, make the distance from the center of the Leveling Knob's threaded shaft to the straight edge 61cm or, 610mm.