



Winch Comparison Guide





	3,000 Lb. ATV Winch	4,000 Lb. ATV/UTV Winch	10,000 Lb. Winch
Single Line Rated Pull	3,000 LB.	4,000 LB.	10,000 LB.
Motor	.85 HP 12V, Permanent magnet	1.1 HP 12V, Permanent magnet	5.5 HP, Bi-Directional, Series wound
Control	Wireless remote	Wireless remote and handle bar mounted wired control	12 ft. corded remote (removable) and a wireless remote control
Gear Reduction Ratio	153:1, Differential planetary	128.2:1, 3 Stage Planetary	148.2:1, 3 Stage Planetary
Clutch	N/A	Cam activated	Sliding ring gear
Free Spooling	Yes	Yes	Yes
Breaking Action	Mechanical and dynamic	Mechanical	Automatic in-the-drum
Cable	35 ft. of 3/16" diameter	47 ½ ft. of 1/4" diameter cable	92 ft. of 5/16" diameter
Dimensions	12" L x 6 1/2" H x 7 1/4" D	13.9" L x 4.6" W x 5.1" H	21.3" L x 6.3" W x 8.6" H
Fairlead	4 way roller fairlead	4 way roller fairlead	4 way roller fairlead
Battery (Recommended)	14 amp/hour minimum or 250 CCA	14 amp/hour minimum or 250 CCA	12 Volt 650 CCA
Power In / Power Out	Yes	Yes	Yes
Shipping Weight	21 LB.	30 LB.	110 LB.

* Price includes free mounting plate and roller fairlead (while supplies last)

** Manufacturing specifications subject to change.



Winch Comparison Guide

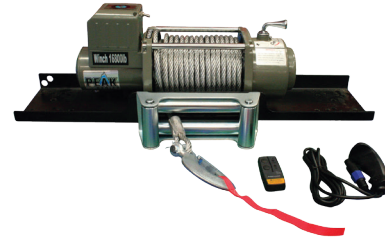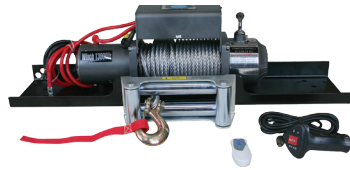

	13,000 Lb. Winch	16,800 Lb. Winch	20,000 Lb. Winch
Single Line Rated Pull	13,000 LB.	16,800 LB.	20,000 LB.
Motor	5.5 HP, Bi-Directional, Series wound	5.6 HP, Bi-Directional, Series wound	7.3 HP, Bi-Directional, Series wound
Control	12 ft. corded remote (removable) and a wireless remote control	12 ft. corded remote (removable) and a wireless remote control	12 ft. corded remote (removable) and a wireless remote control
Gear Reduction Ratio	218.4:1, 3 Stage Planetary	312.4:1, 3 Stage Planetary	375:1, 3 Stage Planetary
Clutch	Sliding ring gear	Sliding ring gear	Sliding ring gear
Free Spooling	Yes	Yes	Yes
Breaking Action	Automatic in-the-drum	Automatic in-the-drum	Automatic in-the-drum
Cable	92 ft. of 3/8" diameter	92 ft. of .450" diameter	85 ft. of .531" diameter
Dimensions	21.3" L x 6.3" W x 8.6" H	21.5" L x 7.09" W x 9.73" H	23.5" L x 13" W x 11.5" H
Fairlead	4 way roller fairlead	4 way roller fairlead	4 way roller fairlead
Battery (Recommended)	12 Volt 650 CCA	12 Volt 650 CCA	12 Volt 650 CCA
Power In / Power Out	Yes	Yes	Yes
Shipping Weight	111 LB.	147 LB.	190 LB.

* Price includes free mounting plate and roller fairlead (while supplies last)

** Manufacturing specifications subject to change.