







Rear Tractor
Tire Size
18.4-38






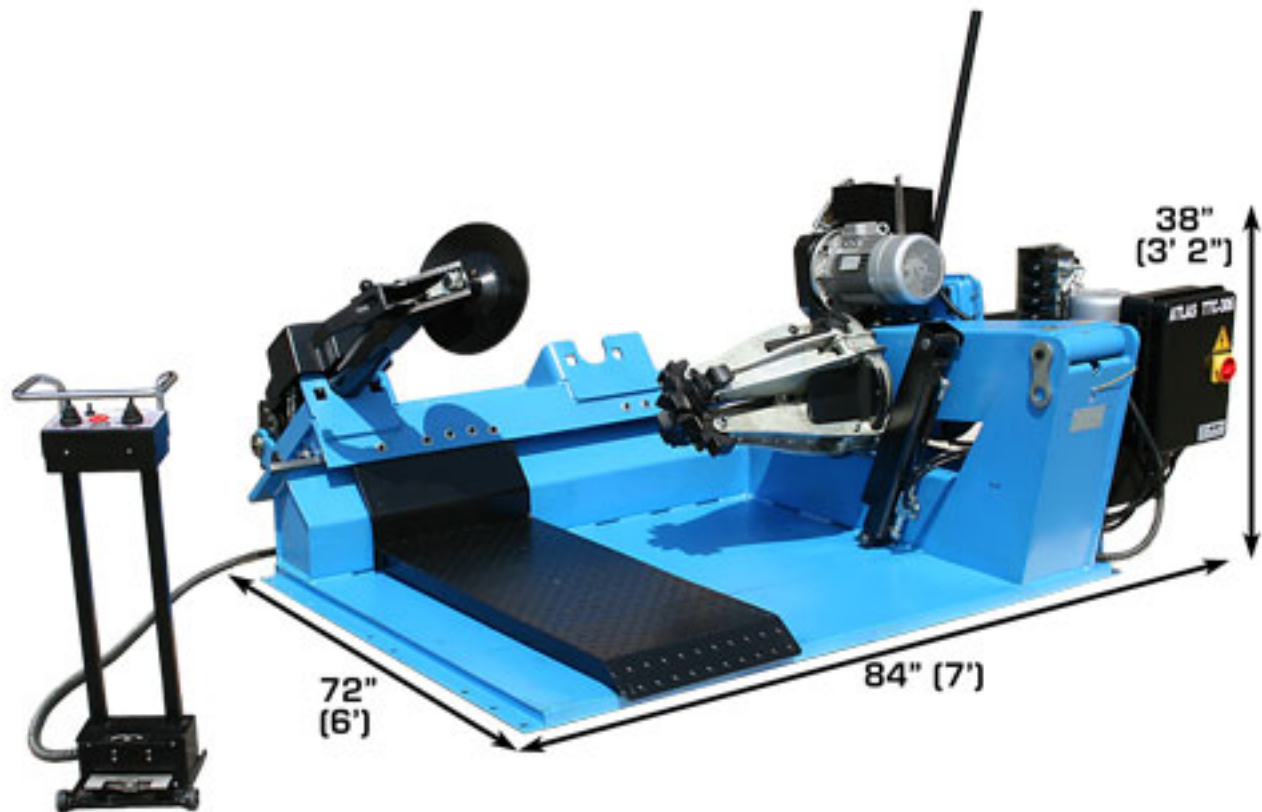


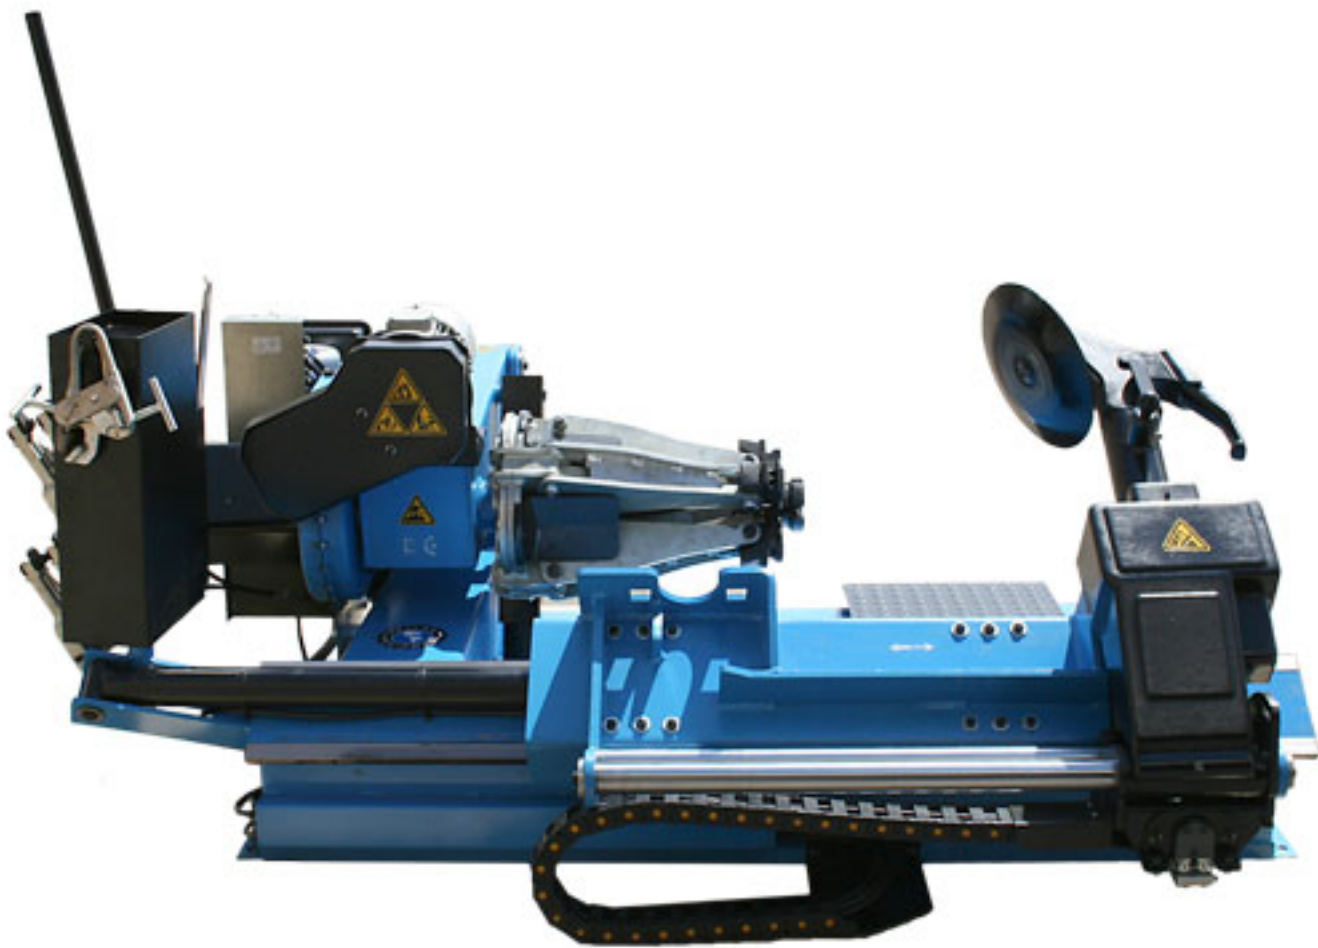

**Powerful Hydraulically
Controlled Jaws**

**Maximum
Clamping Range
45"**

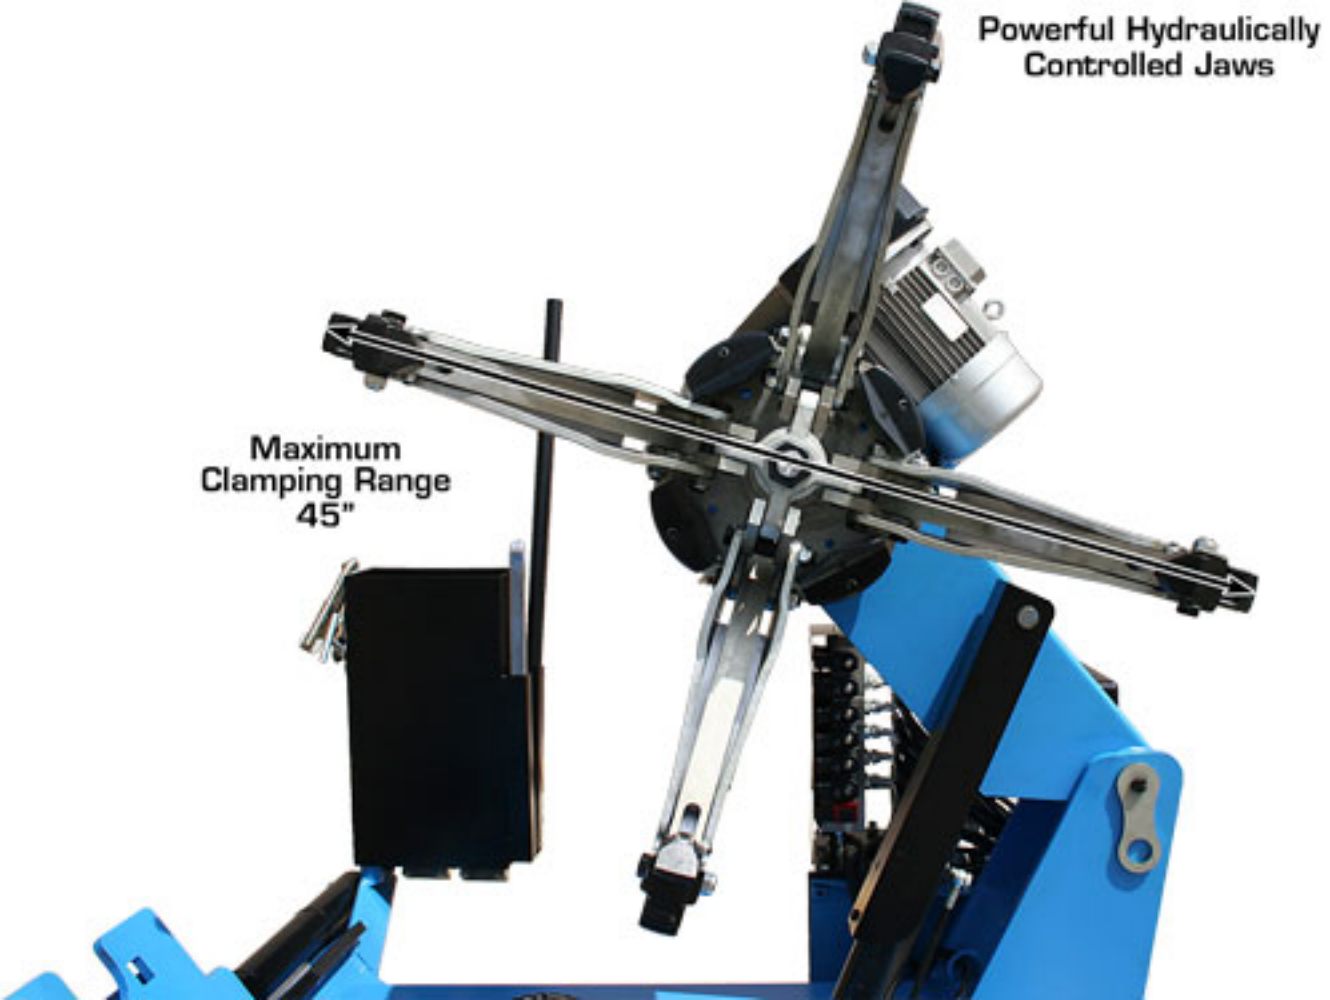

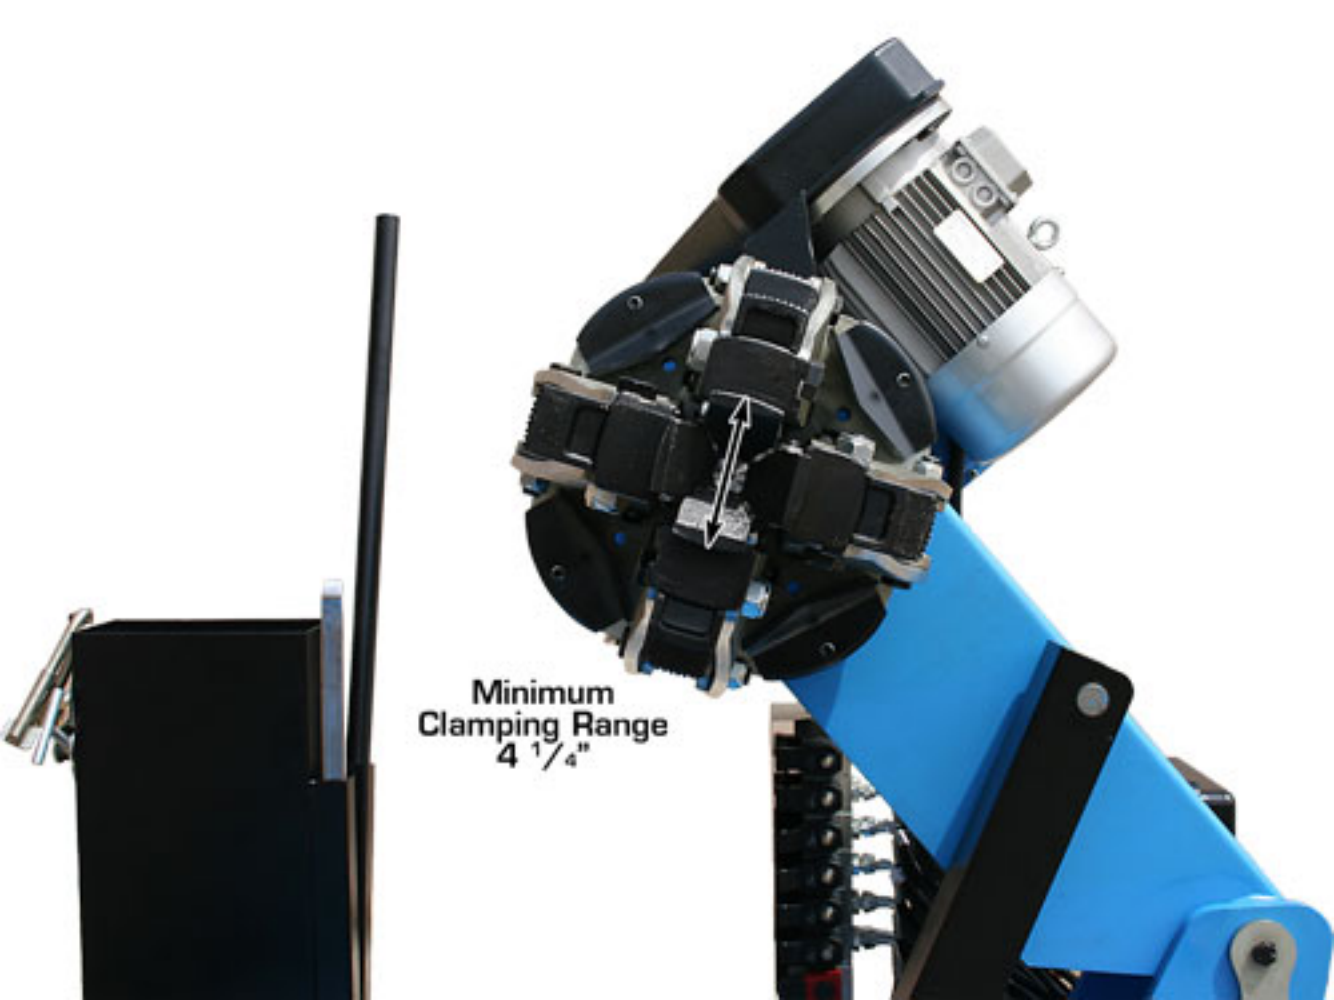


Minimum
Clamping Range
4 1/4"

Auto-Swiveling
Hook/Disc
Tool

Bead Breaking/
Mount/
Demount
Disc

Bead Breaking/Mount/Demount Arm
Can Be "Automatically" Placed
In Two Different Positions

Foldable
Hook Tool

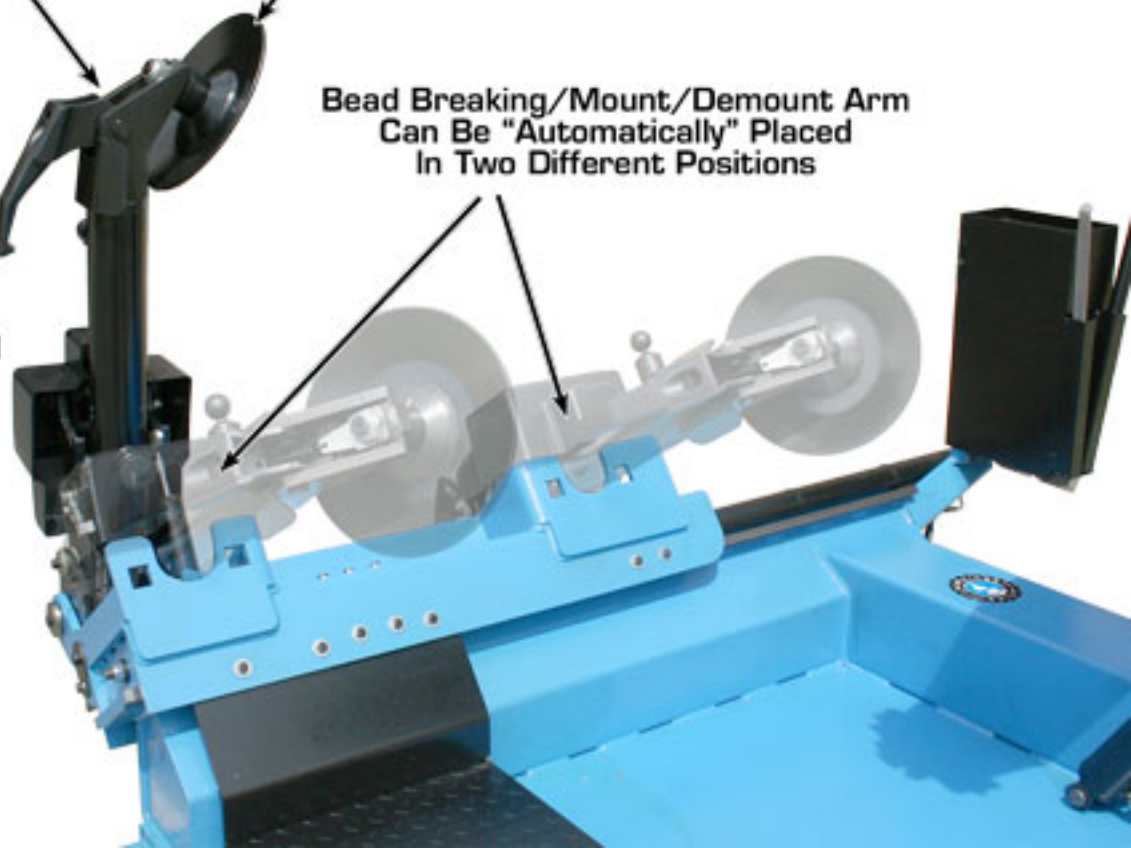


Auto-Swiveling Bead Breaking/Mount/Demount Disc And Hook Tool



**Foldable
Hook Tool**

**Bead Breaking/
Mount/Demount
Disc**

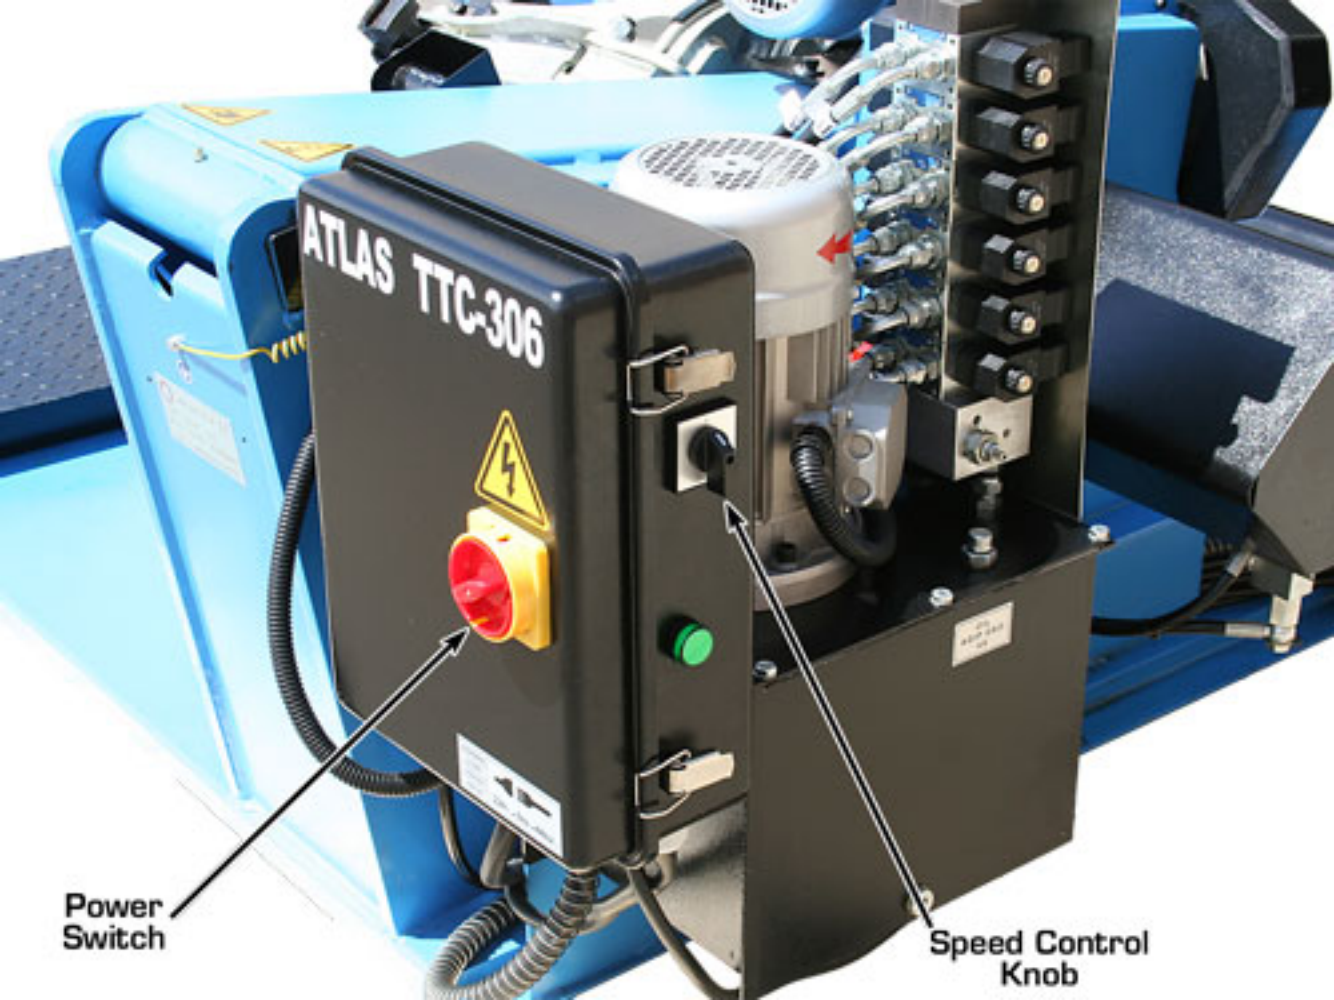


ATLAS TTC-306



Power Switch

Speed Control Knob

**Atlas TTC306
Control Panel**

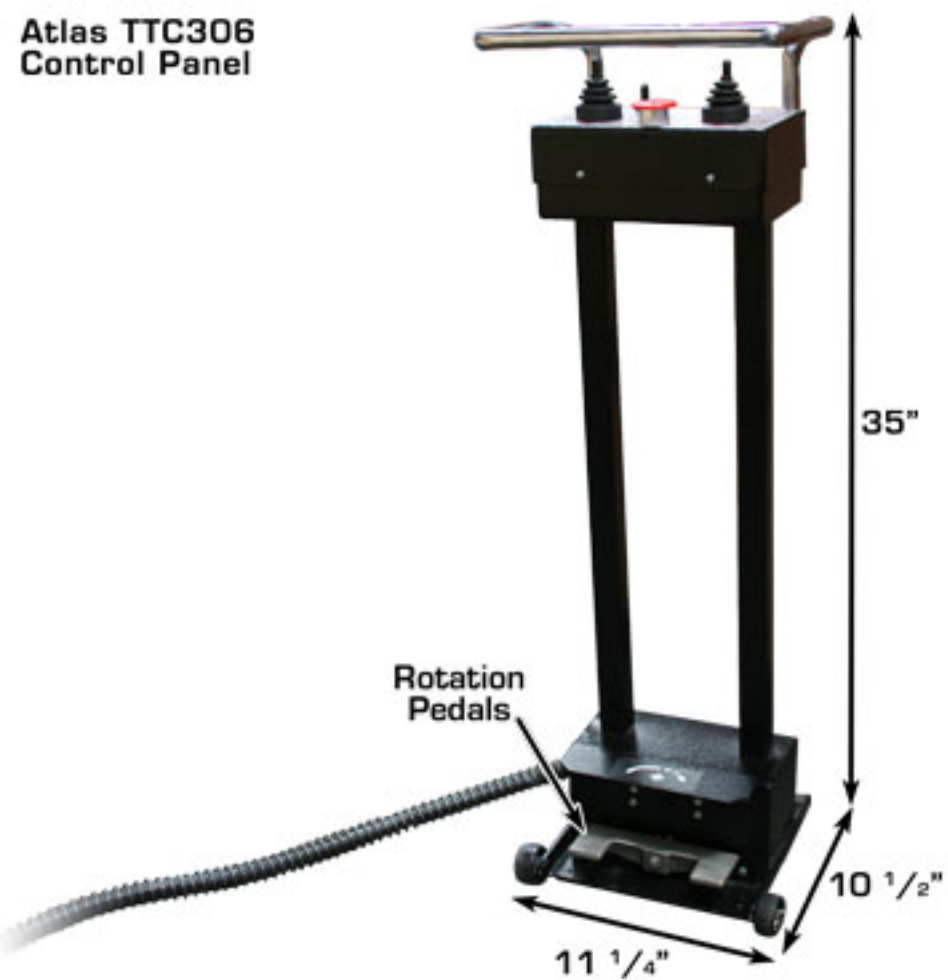

Open/Close
Jaws

Tool
Rotation



Arm Up

Tool Down

Table
Left

Table
Right

Tool
Left

Tool
Right



Arm Down

Emergency
Shut Off
Switch

Tool Up



Standard Accessories

Heavy Duty Tire Tool



Tire Tool



Steel Rim Clamp



Aluminum Rim Clamp



Aluminum Rim
Clamp



**Standard Set Of 4 Extensions
Extend The Rim Diameter Range
To 47"-56"**



The Standard Rim Clamping Extensions Expands The Clamping Range To 47" - 56"


**Maximum
Clamping Range
With Extensions
56"**



**Standard
Aluminum Rim
Adapter Set
With Plastic Inserts**




**Aluminum
Rim Adapters**

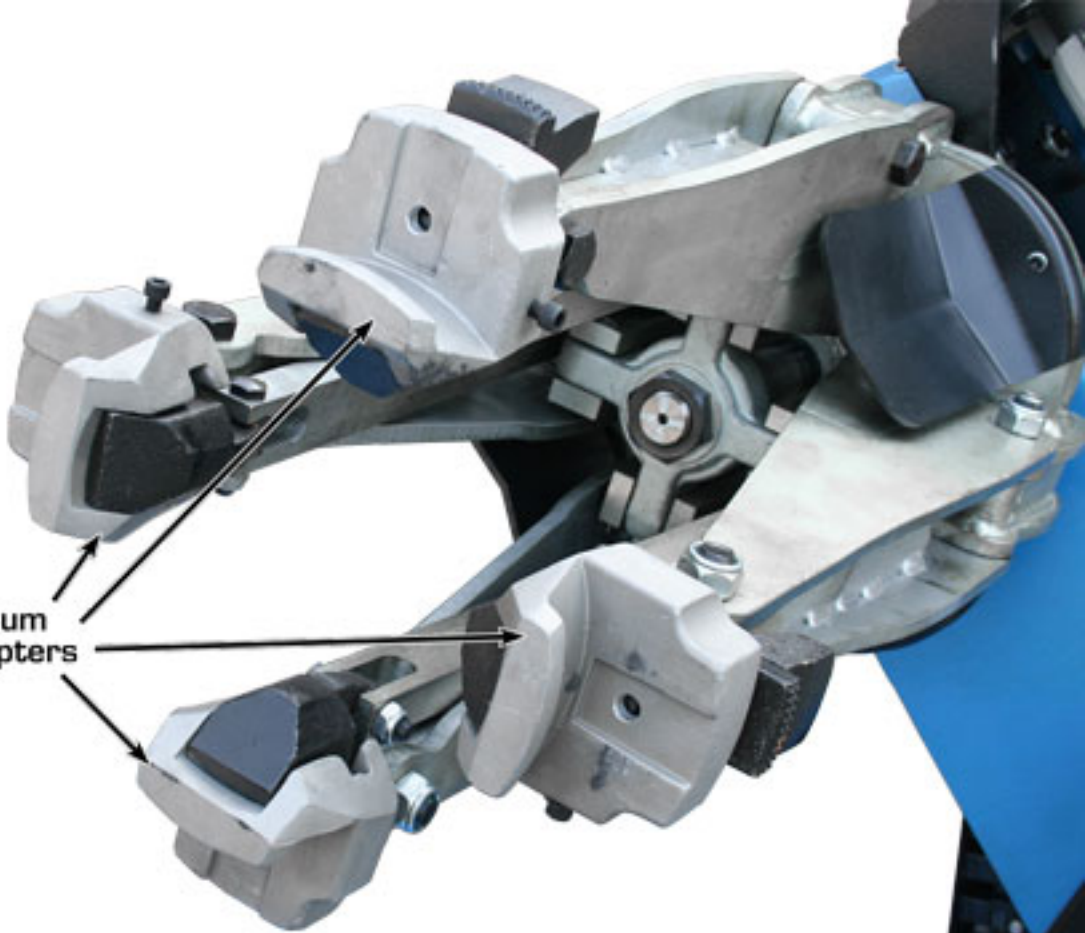



**Atlas TTC306
Ready To Ship
Or Be Picked Up**

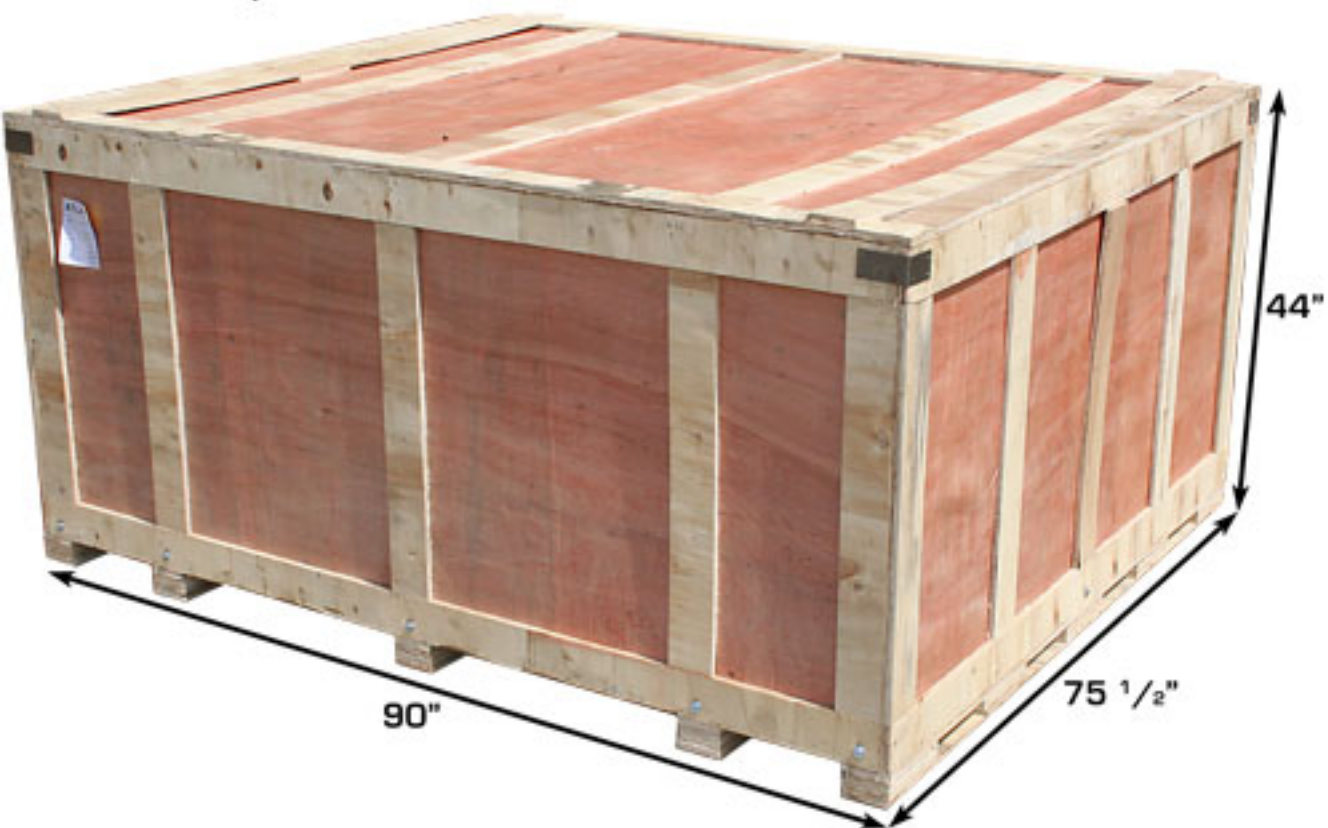

Shipping Weight: 2,260 LBS.